




HR

SERIES

DIN止动挡圈
(恒截面挡圈)
CONSTANT SECTION SNAP RING

孔用
Internal

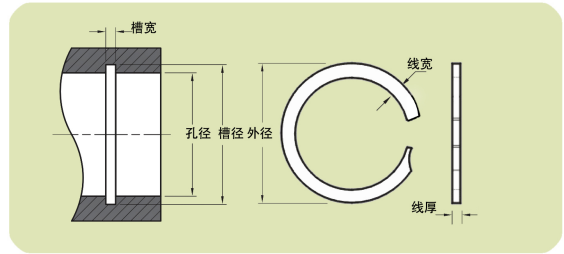

| 型号 | 孔径 | 环(MM) | | | 槽(MM) | | 强度(KN) ³ | | | | |
|-------|----|-------|----------|-------|-------|-------|---------------------|-------|-------|------|-------|
| | | 外径 | 线宽 | 线厚 | 槽径 | 槽厚 | | | | | |
| HR-13 | 13 | 13.73 | 1.40 | 0.94 | 13.6 | 1.10 | 10.59 | | | | |
| HR-14 | 14 | 14.74 | 1.40 | 0.94 | 14.6 | 1.10 | 11.10 | | | | |
| HR-15 | 15 | 15.85 | 1.40 | 0.94 | 15.7 | +0.11 | 12.22 | | | | |
| HR-16 | 16 | 16.90 | 1.65 | 0.94 | 16.8 | -0 | 13.03 | | | | |
| HR-17 | 17 | 17.97 | 1.65 | 0.94 | 17.8 | -0 | 13.84 | | | | |
| HR-18 | 18 | 19.18 | 1.90 | 0.94 | 19.0 | 1.10 | 11.67 | | | | |
| HR-19 | 19 | 20.25 | 1.90 | 0.94 | 20.0 | +0.13 | 15.47 | | | | |
| HR-20 | 20 | 21.20 | 1.90 | 0.94 | 21.0 | -0 | 16.28 | | | | |
| HR-21 | 21 | 22.21 | 1.90 | 0.94 | 22.0 | 1.10 | 17.10 | | | | |
| HR-22 | 22 | 23.22 | 1.90 | 0.94 | 23.0 | 1.10 | 17.91 | | | | |
| HR-23 | 23 | 24.23 | 1.90 | 0.94 | 24.0 | 1.10 | 18.74 | | | | |
| HR-24 | 24 | 25.40 | 2.15 | 1.15 | 25.2 | 1.30 | 23.93 | | | | |
| HR-25 | 25 | 26.45 | 2.15 | 1.15 | 26.2 | +0.21 | 24.91 | | | | |
| HR-26 | 26 | 27.46 | 2.15 | 1.15 | 27.2 | -0 | 25.93 | | | | |
| HR-27 | 27 | 28.47 | 2.38 | ±0.10 | 1.15 | ±0.05 | 28.2 | 1.30 | 26.92 | | |
| HR-28 | 28 | 29.68 | 2.38 | 1.15 | 29.4 | 1.30 | 27.90 | | | | |
| HR-29 | 29 | 30.69 | 2.38 | 1.15 | 30.4 | 1.30 | 28.92 | | | | |
| HR-30 | 30 | 31.79 | +0.38/-0 | 2.38 | 1.15 | 31.4 | 1.30 | 29.91 | | | |
| HR-31 | 31 | 33.01 | 2.38 | 1.15 | 32.7 | 1.30 | 30.89 | | | | |
| HR-32 | 32 | 33.93 | 2.38 | 1.15 | 33.7 | 1.30 | +0.14/-0 | 31.91 | | | |
| HR-33 | 33 | 35.03 | 2.38 | 1.15 | 34.7 | 1.30 | 32.90 | | | | |
| HR-34 | 34 | 36.04 | 3.25 | 1.44 | 35.7 | 1.60 | 40.32 | | | | |
| HR-35 | 35 | 37.35 | 3.25 | 1.44 | 37.0 | 1.60 | 41.49 | | | | |
| HR-36 | 36 | 38.36 | 3.25 | 1.44 | 38.0 | +0.25 | 42.66 | | | | |
| HR-37 | 37 | 39.37 | 3.25 | 1.44 | 39.0 | -0 | 43.87 | | | | |
| HR-38 | 38 | 40.44 | 3.25 | 1.44 | 40.0 | 1.60 | 45.04 | | | | |
| HR-40 | 40 | 42.86 | 4.01 | 1.69 | 42.5 | 1.85 | 55.62 | | | | |
| HR-41 | 41 | 43.91 | 4.01 | 1.69 | 43.5 | 1.85 | 57.00 | | | | |
| HR-42 | 42 | 44.92 | +0.51/-0 | 4.01 | 1.69 | 44.5 | 1.85 | 58.41 | | | |
| HR-45 | 45 | 47.88 | 4.01 | 1.69 | 47.5 | 1.85 | 62.58 | | | | |
| HR-47 | 47 | 49.97 | 4.01 | 1.69 | 49.5 | 1.85 | 65.33 | | | | |
| HR-48 | 48 | 50.98 | 4.01 | 1.69 | 50.5 | 1.85 | 66.74 | | | | |
| HR-50 | 50 | 53.30 | 5.08 | 1.93 | 53.0 | 2.15 | 75.28 | | | | |
| HR-51 | 51 | 54.43 | 5.08 | 1.93 | 54.0 | 2.15 | 76.78 | | | | |
| HR-52 | 52 | 55.52 | 5.08 | 1.93 | 55.0 | 2.15 | 78.27 | | | | |
| HR-55 | 55 | 58.55 | 5.08 | 1.93 | 58.0 | 2.15 | 82.78 | | | | |
| HR-56 | 56 | 59.56 | 5.08 | 1.93 | 59.0 | 2.15 | 84.31 | | | | |
| HR-57 | 57 | 60.68 | +0.63/-0 | 5.08 | ±0.13 | 1.93 | ±0.08 | 60.0 | +0.30 | 2.15 | 85.80 |
| HR-58 | 58 | 61.58 | 5.08 | 1.93 | 61.0 | -0 | 2.15 | 87.29 | | | |
| HR-60 | 60 | 63.60 | 5.08 | 1.93 | 63.0 | 2.15 | 90.31 | | | | |
| HR-62 | 62 | 65.58 | 5.08 | 1.93 | 65.0 | 2.15 | 93.33 | | | | |
| HR-63 | 63 | 66.63 | 5.08 | 1.93 | 66.0 | 2.15 | 94.82 | | | | |
| HR-64 | 64 | 67.64 | 5.08 | 2.41 | 67.0 | 2.65 | 114.74 | | | | |
| HR-65 | 65 | 68.70 | 5.08 | 2.41 | 68.0 | 2.65 | 116.52 | | | | |




HR

SERIES

DIN止动挡圈
(恒截面挡圈)
CONSTANT SECTION SNAP RING

孔用
Internal

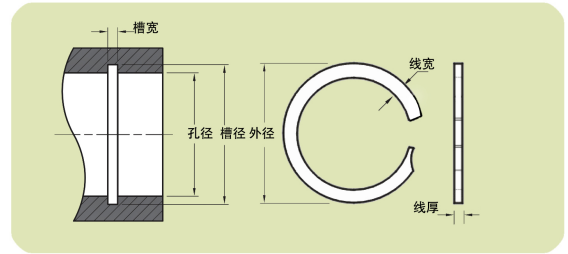

| 型号 | 孔径 | 环 (MM) | | | | | | 槽 (MM) | | | | 强度 (KN) ³ |
|--------|-----|--------|----------|-------|-------|------|-------|--------|-------|------|----------|----------------------|
| | | 外径 | | 线宽 | | 线厚 | | 槽径 | | 槽厚 | | |
| HR-67 | 67 | 70.51 | | 5.08 | | 2.41 | | 70.0 | | 2.65 | | 120.12 |
| HR-68 | 68 | 71.84 | | 5.08 | | 2.41 | | 71.0 | +0.30 | 2.65 | | 121.89 |
| HR-70 | 70 | 73.64 | | 5.08 | | 2.41 | | 73.0 | -0 | 2.65 | | 125.19 |
| HR-72 | 72 | 75.72 | +0.76/-0 | 5.08 | | 2.41 | | 75.0 | | 2.65 | +0.14/-0 | 129.08 |
| HR-75 | 75 | 78.75 | | 5.08 | | 2.41 | | 78.0 | | 2.65 | | 131.16 |
| HR-76 | 76 | 79.88 | | 5.08 | | 2.41 | | 79.0 | | 2.65 | | 136.23 |
| HR-78 | 78 | 81.73 | | 5.08 | | 2.41 | ±0.08 | 81.0 | | 2.65 | | 139.83 |
| HR-80 | 80 | 84.30 | | 6.02 | | 2.41 | | 83.5 | | 2.65 | | 143.43 |
| HR-82 | 82 | 86.32 | | 6.02 | | 2.41 | | 85.5 | | 2.65 | | 146.98 |
| HR-85 | 85 | 89.35 | | 6.30 | | 2.91 | | 88.5 | | 3.15 | | 175.05 |
| HR-88 | 88 | 92.38 | | 6.30 | | 2.91 | | 91.5 | +0.35 | 3.15 | | 181.27 |
| HR-90 | 90 | 94.70 | | 6.30 | | 2.91 | | 93.5 | -0 | 3.15 | | 185.35 |
| HR-92 | 92 | 96.50 | +0.89/-0 | 6.30 | ±0.13 | 2.91 | | 95.5 | | 3.15 | | 189.19 |
| HR-95 | 95 | 99.62 | | 6.30 | | 2.91 | | 98.5 | | 3.15 | | 195.66 |
| HR-98 | 98 | 102.71 | | 6.30 | | 2.91 | | 101.5 | | 3.15 | | 201.83 |
| HR-100 | 100 | 104.50 | | 6.30 | | 2.91 | | 103.5 | | 3.15 | | 205.96 |
| HR-102 | 102 | 107.27 | | 6.73 | | 3.89 | | 106.0 | | 4.15 | | 269.22 |
| HR-105 | 105 | 109.96 | | 6.73 | | 3.89 | | 109.0 | | 4.15 | | 277.13 |
| HR-108 | 108 | 113.09 | | 6.73 | | 3.89 | | 112.0 | +0.54 | 4.15 | | 285.04 |
| HR-110 | 110 | 115.10 | | 6.73 | | 3.89 | | 114.0 | -0 | 4.15 | | 290.34 |
| HR-112 | 112 | 117.12 | | 6.73 | | 3.89 | | 116.0 | | 4.15 | | 295.57 |
| HR-115 | 115 | 120.15 | | 6.73 | | 3.89 | | 119.0 | | 4.15 | | 303.55 |
| HR-120 | 120 | 125.60 | +1.30/-0 | 6.73 | | 3.89 | | 124.0 | | 4.15 | | 316.69 |
| HR-125 | 125 | 130.25 | | 6.73 | | 3.89 | | 129.0 | | 4.15 | | 329.89 |
| HR-127 | 127 | 132.27 | | 6.73 | | 3.89 | | 131.0 | | 4.15 | | 335.19 |
| HR-130 | 130 | 135.30 | | 6.73 | | 3.89 | | 134.0 | | 4.15 | | 343.10 |
| HR-135 | 135 | 140.35 | | 6.73 | | 3.89 | ±0.10 | 139.0 | | 4.15 | +0.18/-0 | 356.30 |
| HR-140 | 140 | 145.26 | | 6.73 | | 3.89 | | 144.0 | +0.63 | 4.15 | | 369.51 |
| HR-145 | 145 | 150.45 | | 6.73 | | 3.89 | | 149.0 | -0 | 4.15 | | 382.72 |
| HR-150 | 150 | 156.50 | | 8.03 | | 3.89 | | 155.0 | | 4.15 | | 395.92 |
| HR-155 | 155 | 161.55 | | 8.03 | | 3.89 | | 160.0 | | 4.15 | | 409.06 |
| HR-160 | 160 | 166.60 | | 8.03 | | 3.89 | | 165.0 | | 4.15 | | 422.27 |
| HR-165 | 165 | 171.70 | +1.40/-0 | 8.03 | | 3.89 | | 170.0 | | 4.15 | | 435.48 |
| HR-170 | 170 | 176.70 | | 8.03 | | 3.89 | | 175.0 | | 4.15 | | 448.68 |
| HR-175 | 175 | 181.75 | | 8.03 | | 3.89 | | 180.0 | | 4.15 | | 461.89 |
| HR-180 | 180 | 186.80 | | 8.03 | | 3.89 | | 185.0 | | 4.15 | | 475.10 |
| HR-185 | 185 | 191.85 | | 8.03 | ±0.15 | 3.89 | | 190.0 | | 4.15 | | 488.23 |
| HR-190 | 190 | 197.15 | | 8.03 | | 3.89 | | 195.0 | | 4.15 | | 501.44 |
| HR-195 | 195 | 201.95 | | 8.03 | | 3.89 | | 200.0 | +0.72 | 4.15 | | 514.65 |
| HR-200 | 200 | 207.00 | | 8.03 | | 3.89 | | 205.0 | -0 | 4.15 | | 527.83 |
| HR-210 | 210 | 217.93 | | 9.48 | | 4.87 | | 216.0 | | 5.15 | | 657.10 |
| HR-220 | 220 | 228.20 | +1.78/-0 | 9.48 | | 4.87 | | 226.0 | | 5.15 | | 688.33 |
| HR-230 | 230 | 238.30 | | 9.48 | | 4.87 | | 236.0 | | 5.15 | | 719.64 |
| HR-240 | 240 | 248.40 | | 9.48 | | 4.87 | | 246.0 | | 5.15 | | 730.93 |
| HR-250 | 250 | 258.50 | | 9.48 | | 4.87 | ±0.13 | 256.0 | | 5.15 | | 782.26 |
| HR-260 | 260 | 270.77 | | 11.05 | | 4.87 | | 268.0 | | 5.15 | | 813.50 |
| HR-270 | 270 | 280.70 | | 11.05 | | 4.87 | | 278.0 | +0.81 | 5.15 | | 844.81 |
| HR-280 | 280 | 290.57 | | 11.05 | ±0.18 | 4.87 | | 288.0 | -0 | 5.15 | | 876.13 |
| HR-290 | 290 | 300.90 | +3.05/-0 | 11.05 | | 4.87 | | 298.0 | | 5.15 | | 907.36 |
| HR-300 | 300 | 311.00 | | 11.05 | | 4.87 | | 308.0 | | 5.15 | | 938.67 |